CANYON REGIONAL water authority

BOARD OF MANAGERS REGULAR BOARD MEETING
Monday, November 30, 2026
10:00 a.m.

This Notice is posted pursuant to the Texas Open Meeting Act. (TEX. REV. CIV. STAT. ANN. Chapter 551, Section 31.) The Canyon Regional Water Authority will hold an in-person meeting at **10:00 AM Monday, November 30, 2026**, regarding provisions of the Texas Open meetings act. Additional information can be obtained by calling: (830) 609-0543.

The Board of Managers will consider the following items and make recommendations to the Board of Trustees as appropriate:

Item 1. Open Meeting & Corrections to October 7, 2026, Meeting Notes (Phil Gage)

Item 2. Water Precipitation/Drought Update: (Steven Risinger)

A. Precipitation update
B. Drought and Canyon Lake update
C. Drought mitigation short-term leases

Item 3. Treated Water Production Update: (Adam Telfer)

A. **Current Water Treatment Operation**
   a. Lake Dunlap WTP
   b. Wells Ranch WTP
   c. Hays Caldwell WTP

Item 4. Water Treatment Plant Improvement Projects Update: (Bobby Rodriguez)

A. **Lake Dunlap WTP**
   a. Strainer Improvements Project
   b. Additional Membrane/WTP Upgrade
B. **Wells Ranch WTP**
   a. Emergency Generator Project
C. **Hays Caldwell WTP**
   a. Phase 1 Improvements
   b. Phase 2 Improvements
   c. Mobile Membrane Filtration Unit

Item 5. Wells Ranch (Kerry Averyt)

A. Wells Ranch III Project/Blumberg Project
   - Participation Agreement Renewal
B. Well No. 1 Replacement
C. Raw Water Tank

Item 6. General Topics/Meetings (Kerry Averyt)

A. Gonzales Water Leases
B. Short-term Leases (GV,SH,CC)
C. RFQ 2026-005 Land Acquisition

Item 7. Items for the next Board of Managers meeting or the Board of Trustees Meeting

Preview Board of Trustees Agenda
Item 8. Adjourn the Meeting

BOARD OF MANAGERS MEETING
CANYON REGIONAL WATER AUTHORITY

Wednesday, October 7, 2026
850 Lakeside Pass
New Braunfels, TX 78130

This Notice is posted pursuant to the Texas Open Meeting Act. (TEX. REV. CIV. STAT. ANN. Chapter 551, Section 31.) The Canyon Regional Water Authority will hold an in-person meeting at **10:00 AM Wednesday, October 7, 2026**, regarding provisions of the Texas Open meetings act. Additional information can be obtained by calling: (830) 609-0543.
The Board of Managers will consider the following items and make recommendations to the Board of Trustees as appropriate:

Item

1 Open Meeting & Corrections to September 9, 2026, Meeting Notes (Phil Gage)

- Phil Gage called the meeting to order at 10:02 am
- There were no corrections to the August Meeting notes.
- Desti Galicia gave a short presentation regarding Data Centers and GVEC FAQ's.

2 Water Precipitation/Drought Update: (Adam Telfer)

A. Precipitation update
B. GBRA In-Out Basin Report
C. Drought and Canyon Lake update
D. Drought mitigation short-term water leases

- The reports are in the packet. Getting some nice rain above Canyon Lake and keeping a steady flow.

3 Treated Water Production Update: (Adam Telfer)

A. **Current Water Treatment Operation**
   a. Lake Dunlap WTP
   b. Wells Ranch WTP
   c. Hays Caldwell WTP

- The reports are in the packet. Usage is down. It has also been a nice cool year, so that helps a lot.

4 Water Treatment Plant Improvement Projects Update: (Bobby Rodriguez)

A. **Lake Dunlap WTP**
   a. Strainer Improvement Project

- The temporary bypass has been put into service about two (2) weeks ago. Yesterday, they completed the shutdown and it went well. The demo work has been started and being putting the system back in. These filters are designed to handle up to 16 MGD is what initially was planned, but they can actually handle up to about 20 MGD.
- Change order that is going to the Board of Trustees for approval, this is for a valve to help with the shut off half of the plant. At the current time if we need to do a shutdown, we have to shut the whole plant down.

   b. Additional Membrane/WTP Upgrade

- Survey is being done at this time. Looking to move this forward soon. Staff have been with the engineer and developed a revised timeline. They did provide us with two (2) price tags one with a new building and one without. The one without, they gave us a high-level estimate of around $24 million. We are getting membranes at no cost, the last amount that was talked about was around $6.5 million.

B. **Wells Ranch WTP**
   a. Emergency Generator Project

- There have been meetings to start the shut down process. Staff will be working with all entities for the shutdown.

C. **Hays Caldwell WTP**
   a. Phase 1 Improvements

- The final walk has been done. There are still a few items that need to be completed. Due to the project being a year late, staff is proposing that instead of collecting formal liquidated damages, we just withhold that from their final payment.

   b. Phase 2 Improvements

- The general contactor has started work on installing a 30-inch stainless steel yard piping. Primezone equipment is being delivered and will last over the next few months. This project is moving forward.

c. Mobile Membrane Filter Unit

- Pall has been on site and changed out all the block and bleeds on the trailers. Staff has installed them on the outside of the trailers. Trailers are running at this time; there is some SCADA programing that needs to be done by Pall and our staff to get things working smoothly. Once all completed staff will talk with Ardurra and go back to TCEQ to get final approval for both trailers. Staff has received the NTP and will be going out today. Staff is hoping to have the approval from TCEQ and the 3rd trailer in place and in operation by March 2027.

d. Pilot Study

- Staff has received TCEQ approval on all three (3) pilot studies, staff is now reviewing that information. This will allow us to pick any of the three (3) technologies to run the systems.

5. Wells Ranch (Kerry Averyt)

A. Wells Ranch III Project/Blumberg Project

- Accenture and CRWA Staff had a site visit with Mr. Blumberg. They are now under contact and look like about 8 months until an RFQ to actually get the P3 firm on board. Staff has been working with Accenture to get this completed and will meet with the periodically as well as give updates to the Board of Trustees.
- Mr. Averyt and Brandon meet with the Groundwater district, CRWA has about 5,200 acres of leases already procured, they advised that we proceed with permitting for what we already have now.

B. Wells Nos. 2 & 14 Upgrades

- Staff are working on closeout documents. Wells are in service.

C. Well No. 1 Replacement

- The contactor has moved over the well and has poured concrete for the piping. The conduit has also been completed. In two weeks GVEC will be out to pour their concrete for their pad for the transformer, in about three weeks they will install the transformer. This is still in review with TCEQ.

D. Raw Water Tank Leak Assessment

- Staff is getting quotes for seal work. The tank is in good shape.

6 General Topics/Meetings (Kerry Averyt)

A. Gonzales Water Leases

- No update currently. We have received a letter from their legal counsel a few days ago. They are proposing to increase the export fees. CRWA and some of the other exporters are negotiating the fees.

B. Short-term Leases (GV, SH, CC)

- No updates currently.

C. Facility Needs and Status

- No updates currently.

Items for the next Board of Managers meeting or the Board of Trustees Meeting

A. Preview Board of Trustees Agenda

- We talked about moving the Board of Managers meetings to the last Monday of each month.
-

8 Announcements and Adjourn

- Meeting adjourns at 11:23 am

Lake Dunlap WTP / Wells Ranch WTP / Hays Caldwell WTP
Usage Report

CRWA Monthly Production, Daily Average and Peak Day									
2026	Lake Dunlap WTP			Wells Ranch WTP			Hays Caldwell WTP		
Date	Total Monthly Production MG	Production Daily Average MG	Production Peak Day MG	Total Monthly Production MG	Production Daily Average MG	Production Peak Day MG	Total Monthly Production MG	Production Daily Average MG	Production Peak Day MG
Jan-26	250.77	8.09	10.96	315.85	10.19	12.82	54.25	1.75	2.06
Feb-26	233.48	8.34	11.31	275.41	9.84	12.44	50.67	1.81	2.10
Mar-26	328.13	10.58	12.30	304.70	9.83	13.08	58.47	1.89	2.11
Apr-26	275.54	9.18	12.24	300.28	10.01	12.37	54.62	1.82	2.09
May-26	269.23	8.68	11.33	305.39	9.85	11.99	59.99	1.94	2.30
Jun-26	282.37	9.41	12.18	279.60	9.32	11.79	60.46	2.02	2.46
Jul-26	303.21	9.78	12.60	323.10	10.42	12.65	68.58	2.21	2.53
Aug-26	345.12	11.13	12.91	367.41	11.85	13.55	75.94	2.45	2.84
Sep-26	349.28	11.64	12.99	321.37	10.71	12.52	75.57	2.52	2.79
Oct-26	284.63	9.18	11.58	293.89	9.48	12.25	71.26	2.30	2.53
Nov-26									
Dec-26									
YTD	**2,921.76**	**9.60**	**12.99**	**3,087.01**	**10.15**	**13.55**	**629.82**	**2.07**	**2.84**

Comments:

Acronyms:
MG = Million Gallons
TCEQ = Texas Commission on Environmental Quality
WTP = Water Treatment Plant


The numbers in the table above represent each plant's total production for the month, the peak day, and the daily average flow in million gallons. These numbers are included in monthly reporting to TCEQ.

Lake Dunlap WTP / Wells Ranch WTP / Hays Caldwell WTP
Usage Report

YEAR 2026 (January thru October)


Lake Dunlap WTP
Raw Water Use

	Annual Allocation Acre-feet	YTD Use Acre-feet	Available Acre-feet
GBRA Leased Water	10,575.00	7,513.37	3,061.63
Lake Dunlap Water Rights			
#18-3829	400.00	175.00	225.00
#18-3832-A	44.00	44.00	0.00
#18-3833-B	30.50	28.00	2.50
#18-3834	71.48	37.34	34.14
#18-3834-A	18.52	8.00	10.52
Totals	**11,139.50**	**7,805.71**	**3,333.79**

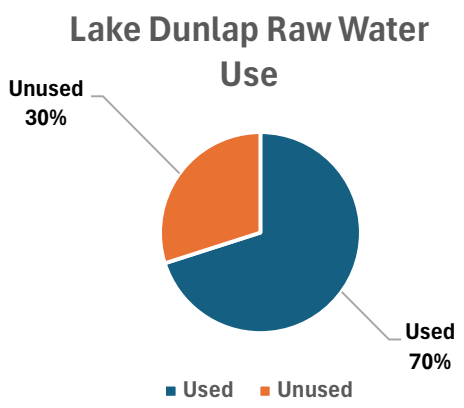


Wells Ranch WTP
Raw Water Use

	Annual Allocation Acre-feet	YTD Use Acre-feet	Available Acre-feet
Guadalupe County			
Carrizo Permit	3,174.68	1,363.36	1,811.32
Wilcox Permit	3,026.00	2,098.18	927.82
Gonzales County			
Carrizo Permit	8,320.05	6,459.28	1,860.77
Totals	**14,520.73**	**9,920.81**	**4,599.92**

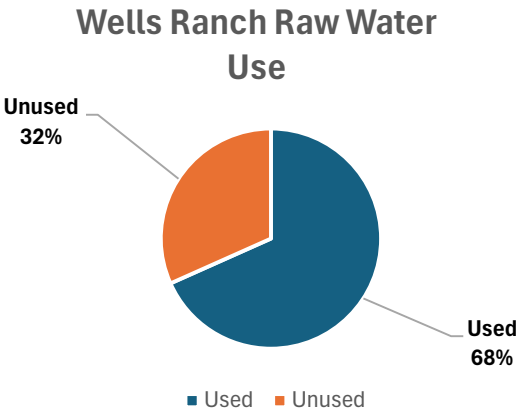

Hays Caldwell WTP
Raw Water Use

	Annual Allocation Acre-feet	YTD Use Acre-feet	Available Acre-feet
GBRA Leased Water	2,038.00	1,603.88	434.12
Hays Caldwell Water Rights			
#18-3887-603	516.16	382.01	134.15
#18-3889-A	24.00	0.00	24.00
#18-3888-A	320.00	0.00	320.00
Totals	**2,898.16**	**1,985.89**	**912.27**

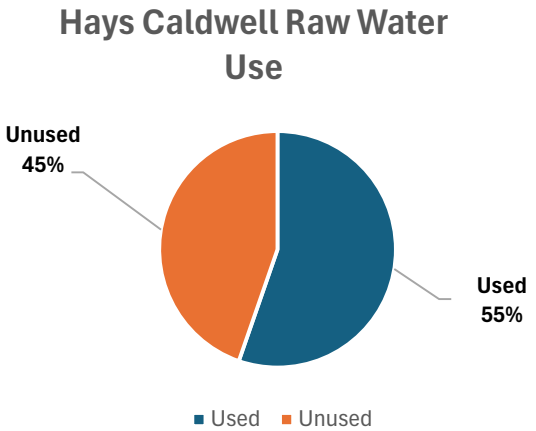

Lake Dunlap WTP / Wells Ranch WTP / Hays Caldwell WTP
Usage Report


YEAR 2026 (January thru October)

Lake Dunlap - Raw Water Trend




Month	Target AF	2026 AF
Jan	668.37	679.38
Feb	646.09	603.03
Mar	891.16	867.80
Apr	891.16	722.77
May	1,002.56	728.08
Jun	1,047.11	752.77
Jul	1,225.35	766.60
Aug	1,225.35	976.96
Sep	1,113.95	947.89
Oct	1,002.56	760.42
Nov	690.65	0.00
Dec	735.21	0.00
Total	**11,139.50**	**7,805.71**

Wells Ranch - Raw Water Trend

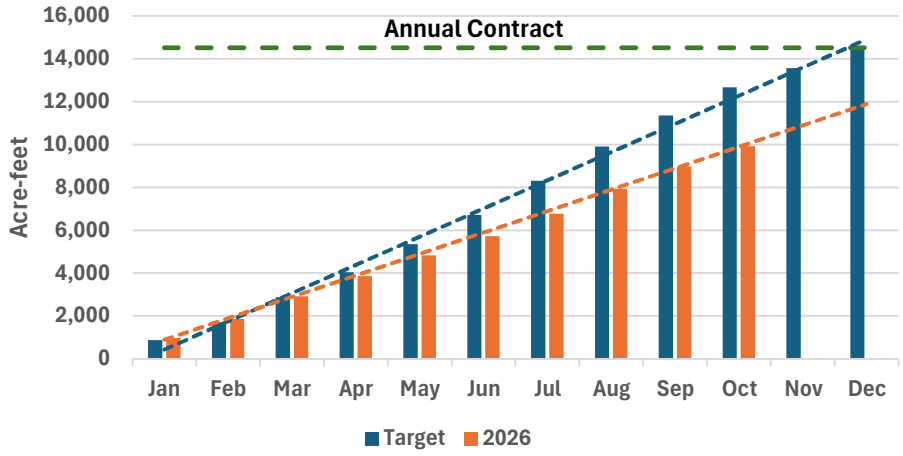

Month	Target AF	2026 AF
Jan	871.24	982.05
Feb	842.20	869.87
Mar	1,161.66	1,062.70
Apr	1,161.66	948.65
May	1,306.87	969.86
Jun	1,364.95	888.16
Jul	1,597.28	1,045.55
Aug	1,597.28	1,172.27
Sep	1,452.07	1,034.72
Oct	1,306.87	946.98
Nov	900.29	0.00
Dec	958.37	0.00
Total	**14,520.73**	**9,920.81**

Hays Caldwell - Raw Water Trend

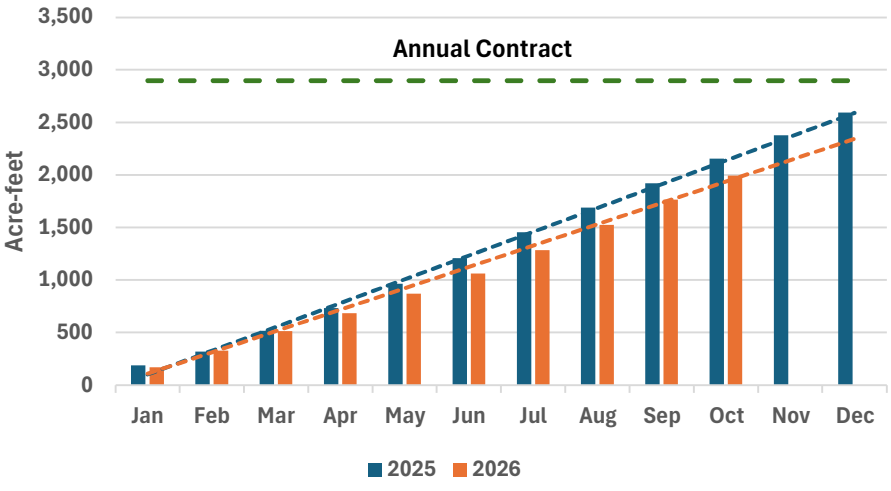

Month	Target AF	2026 AF
Jan	186.66	170.47
Feb	132.22	158.54
Mar	197.03	182.62
Apr	217.77	169.81
May	230.73	186.86
Jun	243.69	190.57
Jul	246.28	219.77
Aug	235.91	242.05
Sep	230.73	239.16
Oct	233.32	226.03
Nov	222.95	0.00
Dec	215.17	0.00
Total	**2,592.46**	**1,985.89**

Lake Dunlap WTP / Wells Ranch WTP / Hays Caldwell WTP
Usage Report

YEAR 2026 (January thru October)							
Hays Caldwell Treated Water Monthly Use by Entity							
Treated (Delivered) Water	**Month**	**County Line Acre-feet**	**Crystal Clear Acre-feet**	**Martindale Acre-feet**	**Maxwell Acre-feet**		**Hays Caldwell Total Treated (Delivered) Acre-feet**
	Jan-26	27.64	22.92	9.57	103.82		163.95
	Feb-26	26.17	24.01	7.79	94.32		152.30
	Mar-26	33.70	27.50	7.19	114.09		182.48
	Apr-26	30.76	25.14	7.06	105.82		168.79
	May-26	30.90	30.41	8.90	115.34		185.55
	Jun-26	44.22	24.88	8.99	108.59		186.67
	Jul-26	52.16	28.97	10.64	120.57		212.34
	Aug-26	58.51	36.04	9.99	131.18		235.72
	Sep-26	56.61	42.32	11.48	123.88		234.30
	Oct-26	47.18	43.50	11.51	118.39		220.58
	Nov-26	0.00	0.00	0.00	0.00		0.00
	Dec-26	0.00	0.00	0.00	0.00		0.00
	Total Use	**407.86**	**305.69**	**93.11**	**1,136.01**		**1,942.67**

Lake Dunlap / Wells Ranch Treated Water Use by Entity							
Treated (Delivered) Water	**Month**	**East Central Acre-feet**	**Green Valley Acre-feet**	**Cibolo Acre-feet**	**Springs Hill Acre-feet**	**Crystal Clear Acre-feet**	***Lake Dunlap / Wells Ranch Sub-Total (1) Acre-feet**
	Jan-26	232.16	432.40	164.75	132.28	96.68	1,058.27
	Feb-26	220.13	405.61	147.73	109.92	94.28	977.68
	Mar-26	264.02	533.70	202.23	145.19	98.44	1,243.59
	Apr-26	245.67	467.06	182.68	132.38	77.59	1,105.38
	May-26	262.20	458.94	181.56	141.92	83.26	1,127.88
	Jun-26	255.01	426.84	185.96	144.45	83.53	1,095.78
	Jul-26	243.27	444.32	229.06	195.85	100.56	1,213.05
	Aug-26	268.96	550.22	261.73	225.78	119.03	1,425.73
	Sep-26	183.39	522.84	245.62	186.45	119.02	1,257.34
	Oct-26	180.15	430.99	209.58	145.79	91.70	1,058.21
	Nov-26	0.00	0.00	0.00	0.00	0.00	0.00
	Dec-26	0.00	0.00	0.00	0.00	0.00	0.00
	Total Use	**2,354.97**	**4,672.92**	**2,010.89**	**1,560.01**	**964.10**	**11,562.89**

*See next page for Lake Dunlap Wells Ranch Treated Water Use by Entity Total.

Lake Dunlap WTP / Wells Ranch WTP / Hays Caldwell WTP
Usage Report

YEAR 2026 (January thru October)

Lake Dunlap / Wells Ranch Treated Water Monthly Use by Entity

Treated (Delivered) Water	Month	SAWS Acre-feet	Marion Acre-feet	Converse Acre-feet	**Lake Dunlap / Wells Ranch Sub-Total (2) Acre-feet	*Lake Dunlap / Wells Ranch Sub-Total (1) Acre-feet	Lake Dunlap / Wells Ranch Total Acre-feet
	Jan-26	512.50	13.98	33.16	559.64	1,058.27	1,617.91
	Feb-26	448.75	10.64	30.66	490.05	977.68	1,467.73
	Mar-26	518.12	12.57	33.29	563.98	1,243.59	1,807.56
	Apr-26	477.01	12.10	31.88	521.00	1,105.38	1,626.38
	May-26	483.00	12.36	37.83	533.19	1,127.88	1,661.07
	Jun-26	487.51	12.13	37.31	536.95	1,095.78	1,632.72
	Jul-26	559.74	15.97	40.67	616.37	1,213.05	1,829.42
	Aug-26	608.43	19.57	46.82	674.82	1,425.73	2,100.54
	Sep-26	534.47	18.02	37.51	589.99	1,257.34	1,847.33
	Oct-26	519.77	16.44	41.13	577.33	1,058.21	1,635.55
	Nov-26	0.00	0.00	0.00	0.00	0.00	0.00
	Dec-26	0.00	0.00	0.00	0.00	0.00	0.00
	Total Use	**5,149.28**	**143.77**	**370.26**	**5,663.32**	**11,562.89**	**17,226.21**

*Sub-Total (1) from previous page - East Central, Green Valley, Cibolo, Springs Hill, and Crystal Clear
**Sub-Total (2) from current page - SAWS, Marion, and Converse.


Entity Percentage Use Treated Water

Drought Stage	Entity	LD/WR/HC Contract Acre-feet	YTD Use Acre-feet	% Used	Comments
	Cibolo	3,210.93	2,010.89	62.6%	*Maxwell has leased 250 AF/YR from Countyline. *Maxwell has leased 80 AF/YR from Martindale. **Springs Hill has leased 500 AF/YR from SAWS.
	Converse	500.00	370.26	74.1%	
	County Line	1,058.00	407.86	38.5%	
	Crystal Clear - WR	1,292.39	964.10	74.6%	
	Crystal Clear - HC	500.00	305.69	61.1%	
	East Central	2,400.00	2,354.97	98.1%	
	Green Valley	7,455.68	4,672.92	62.7%	
	Marion	300.00	143.77	47.9%	
	Martindale	120.00	93.11	77.6%	
	* Maxwell	1,230.00	1,136.01	92.4%	
	** Springs Hill	2,550.00	1,560.01	61.2%	
	SAWS	6,300.00	5,149.28	81.7%	

EXECUTIVE DROUGHT SNAPSHOT

CRWA SERVICE AREA | BOM BRIEFING

Current conditions at a glance

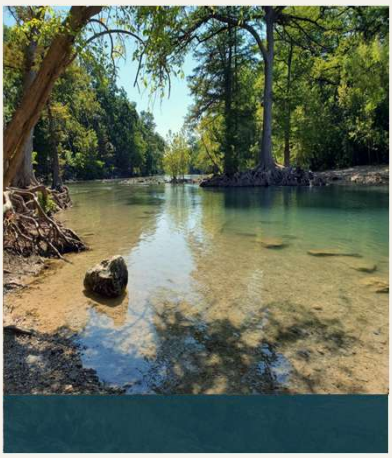

STAGE 1 TRIGGER

≤895 ft Canyon Reservoir trigger

72.5% full

STAGE 2 TRIGGER

890 ft Moderate shortage

64% full

STAGE 3 TRIGGER

885 ft Severe shortage

56% full

WELLS RANCH SUPPLY

13,029 AF/yr Contracts

Guadalupe + Gonzales

SURFACE SUPPLY

14,788 AF/yr Lake Dunlap + Hays Caldwell

10,980 + 3,808

BOARD TAKEAWAY

CRWA's adopted plan ties Canyon Reservoir supply response to elevation. Stage 1 begins at 895 ft: voluntary 5% reduction

VERIFIED PLAN VALUES | CRWA DCP, APRIL 2024

Sources: US Drought Monitor • TWDB • USGS • NOAA • applicable GCDs • CRWA operations

1

EXECUTIVE DROUGHT SNAPSHOT

CRWA SERVICE AREA | BOARD BRIEFING

REGIONAL DROUGHT

D1–D2

CRWA Service Area

YTD. RAINFALL

30.39in

98% of normal

CANYON RESERVOIR

907.24 ft

96.2% full

GROUNDWATER

159.36ft

Well ID: 6733907/ Carrizo-Wilcox/ NAD 83

BOARD TAKEAWAY

Regional drought conditions are worsening, but CRWA's current surface-water position remains strong. Canyon Reservoir is near conservation-pool elevation and remains well above the Stage 1 drought-response trigger (5% voluntary reduction)


DATA AS OF: 11/18/2026

SOURCE: USDM • TWDB • USGS • NOAA • GCDs • CRWA operations

2

CURRENT DROUGHT CONDITIONS

REGIONAL CONDITIONS

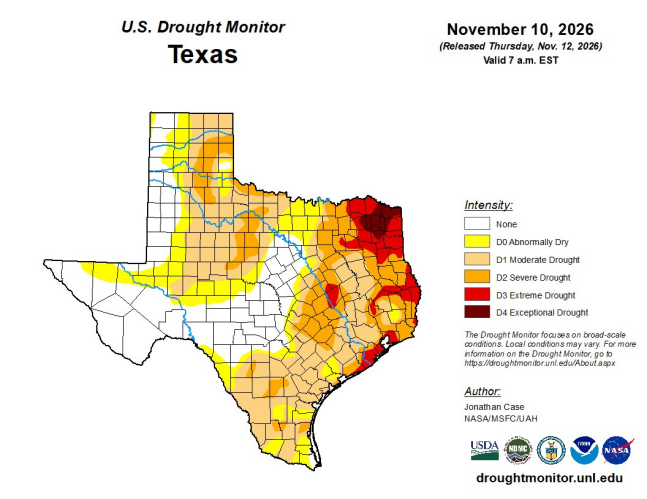

CURRENT CLASSIFICATION

D0 to D1 – Moderate Drought

Highest category in CRWA service area

1-MONTH CHANGE

Improving

AREA AFFECTED

100%

CRWA service area

KEY TAKEAWAY: Drought conditions have improved across the CRWA service area, with conditions ranging from D0 to D1; however, current reservoir conditions provide a strong near-term surface-water position.


DATA AS OF: 11/18/2026

SOURCE: U.S. Drought Monitor / TWDB

3

RAINFALL: HOW DID WE GET HERE?

PRECIPITATION

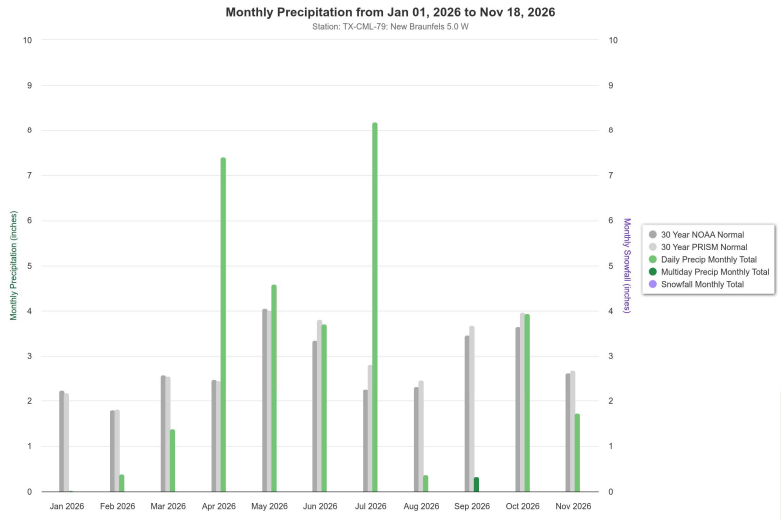

YEAR-TO-DATE

32.12 in

TX-CML-79/ New Braunfels 5.0 W

NORMAL

30.92 in

30-year normal

DEPARTURE

+1.20 in

100% of normal

KEY TAKEAWAY: Year-to-date rainfall is 32.12 inches, approximately 1.2 inches above the NOAA 30-year normal, helping support improved water-supply conditions despite continued regional drought.

DATA AS OF: 11/18/2026

SOURCE: NOAA / NWS / TexMesonet

4

CANYON RESERVOIR & SURFACE-WATER SUPPLY

SURFACE WATER



CURRENT ELEVATION

907.64 ft msl

Conservation pool: 909 ft msl

STORAGE

97.1%

367,757 acre-feet

CHANGE

+18.02 ft

vs. October 2025

CURRENT STAGE

Non - Drought

GBRA response

NEXT TRIGGER

895 ft msl STAGE 1 Voluntary 5% Reduction

12.64 ft above next trigger

KEY TAKEAWAY: Canyon Reservoir is at 907.64 ft msl and 97.1% full, approximately 13 feet above CRWA's 895-ft Stage 1 trigger, providing substantial near-term buffer before a drought-response threshold is reached

DATA AS OF: 11/18/2026

SOURCE: TWDB Water Data for Texas • GBRA • CRWA Drought Contingency Plan

5

GROUNDWATER CONDITIONS & WELLS RANCH

GROUNDWATER

	Date	Daily High Water Level (ft below land surface)	Height Below Today (ft)
Today	2026-11-18	159.65	- n.a. -
Yesterday	2026-11-17	159.61	-0.04
2 days ago	2026-11-16	159.76	0.11
1 week ago	2026-11-11	159.49	-0.16
1 month ago	2026-10-18	159.33	-0.32
3 months ago	2026-08-18	158.95	-0.70
6 months ago	2026-05-18	158.48	-1.17
1 year ago	2025-11-18	- n.a. -	- n.a. -
oldest	2019-04-24	148.30	-11.35

CURRENT WATER LEVEL

159.65 ft

Well ID: 6733907/ Carrizo - Wilcox/ NAD 83 (Nockenut Rd.)

3-MONTH CHANGE

+0.70 ft

Increasing

DFC COMAPARISON

GMA 13 DFC: 75 % Saturation Thickness

Current: approximately 92% Saturation Thickness

KEY TAKEAWAY: Groundwater conditions remain favorable, with the representative monitoring well increasing 0.70 feet over the past 3 months and current saturation thickness at approximately 92%.

DATA AS OF: 11/18/2026

SOURCE: GCGCD • GCUWCD • TWDB • CRWA monitoring data

6

WHAT THE DROUGHT MEANS FOR CRWA OPERATIONS

SYSTEM OPERATIONS

LAKE DUNLAP WTP	HAYS-CALDWELL WTP	WELLS RANCH WTP	TOTAL CRWA
8.3 MGD	2.0 MGD	9.6 MGD	19.9 MGD
[Current production]	[Current production]	[Current production]	[Current / average]

PEAK-DAY DEMAND	SOURCE MIX	AVAILABLE CAPACITY
[XX.X MGD]	[XX% / XX%]	[XX.X MGD]
[Date: ___]	Surface water / groundwater	[Operationally available capacity]

OPERATIONAL RESPONSE: Current hydrologic conditions do not require a drought-driven source shift; CRWA will continue monitoring demand, surface-water conditions, and Wells Ranch availability while maintaining operational flexibility across its supply portfolio.

KEY TAKEAWAY: CRWA currently maintains multiple supply sources and operational flexibility to respond if drought conditions intensify or wholesale demand increases


DATA AS OF: 11/3/2026

SOURCE: CRWA SCADA / production / wholesale delivery records

7

DROUGHT OUTLOOK

NEXT 30–90 DAYS

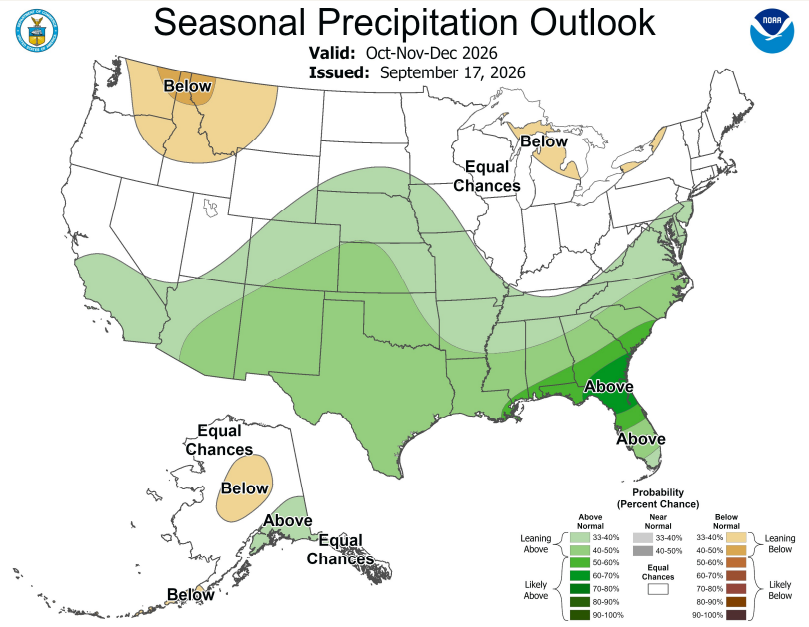

PRECIPITATION

40–50% probability of above-normal precipitation

KEY TAKEAWAY:


The October–December outlook favors above-normal precipitation across South-Central Texas, providing a potentially favorable near-term signal, although reservoir and groundwater conditions should continue to be monitored independently

SOURCE: NOAA Climate Prediction Center / NIDIS

8

DROUGHT OUTLOOK

NEXT 30–90 DAYS

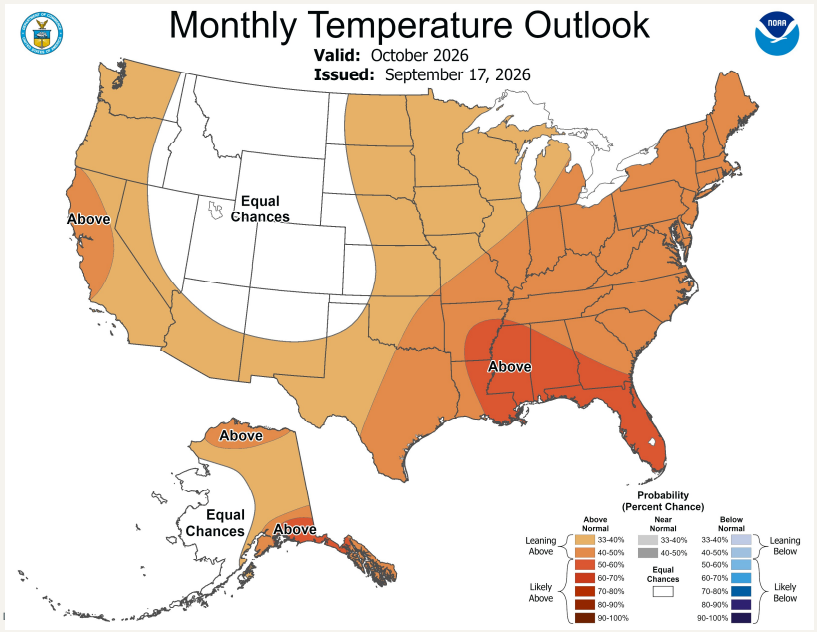

Temperature

40–50% probability of above-normal temperatures

KEY TAKEAWAY:

Above-normal temperatures remain favored, which could increase water demand and evaporative losses and partially offset the benefit of wetter conditions.

SOURCE: NOAA Climate Prediction Center / NIDIS

9

MANAGEMENT ACTIONS & BOARD TAKEAWAYS

DECISION POINTS

CURRENT STATUS

No Canyon Reservoir drought-response stage currently indicated

- Surface-water supply remains strong
- Canyon Reservoir near conservation pool
- Regional drought conditions warrant continued monitoring

CRWA ACTIONS

- **Continue reservoir, rainfall, and groundwater monitoring**

NEXT TRIGGERS

Canyon Reservoir: 895 ft msl

- Approximately 13 ft below current elevation
- 5% voluntary reduction for stage 1 under the adopted Drought Contingency Plan


BOARD MESSAGE: CRWA currently has a strong surface-water position, with Canyon Reservoir near conservation pool and approximately 13 feet above the Stage 1 trigger. Regional drought conditions warrant continued monitoring, but the available data do not presently indicate an immediate reservoir-driven drought-response action

SOURCE: CRWA management assessment • supporting sources from prior slides

DATA AS OF: 11/3/2026

10


Task Name	Duration	Start	Finish
Hays Caldwell Projects	**1334 days**	**7/18/23**	**3/13/27**
Improvements Phase I	**930 days**	**7/18/23**	**2/2/26**
Repackage Engineering	126 days	7/18/23	11/21/23
Bid	30 days	11/22/23	12/22/23
Construction	335 days	7/17/24	6/17/25
Substantial completion	30 days	6/17/25	7/17/25
Substantial completion date achieved	0 days	2/2/26	2/2/26
Final Completion	0 days	7/17/25	7/17/25
Improvements Phase II	**892 days**	**10/2/24**	**3/13/27**
Repackage Engineering	65 days	10/2/24	12/6/24
Bid	56 days	12/6/24	1/31/25
Construction	528 days	9/1/25	2/11/27
Substantial completion	30 days	2/11/27	3/13/27
Completion	0 days	3/13/27	3/13/27
Membrane Pilot Study	**689 days**	**8/26/24**	**7/16/26**
Pilot solicitation	60 days	8/26/24	10/25/24
Board approval	103 days	10/29/24	2/9/25
Delivery and set up	211 days	2/9/25	9/8/25
Pilot testing	172 days	9/8/25	2/27/26
TCEQ Review	90 days	4/17/26	7/16/26

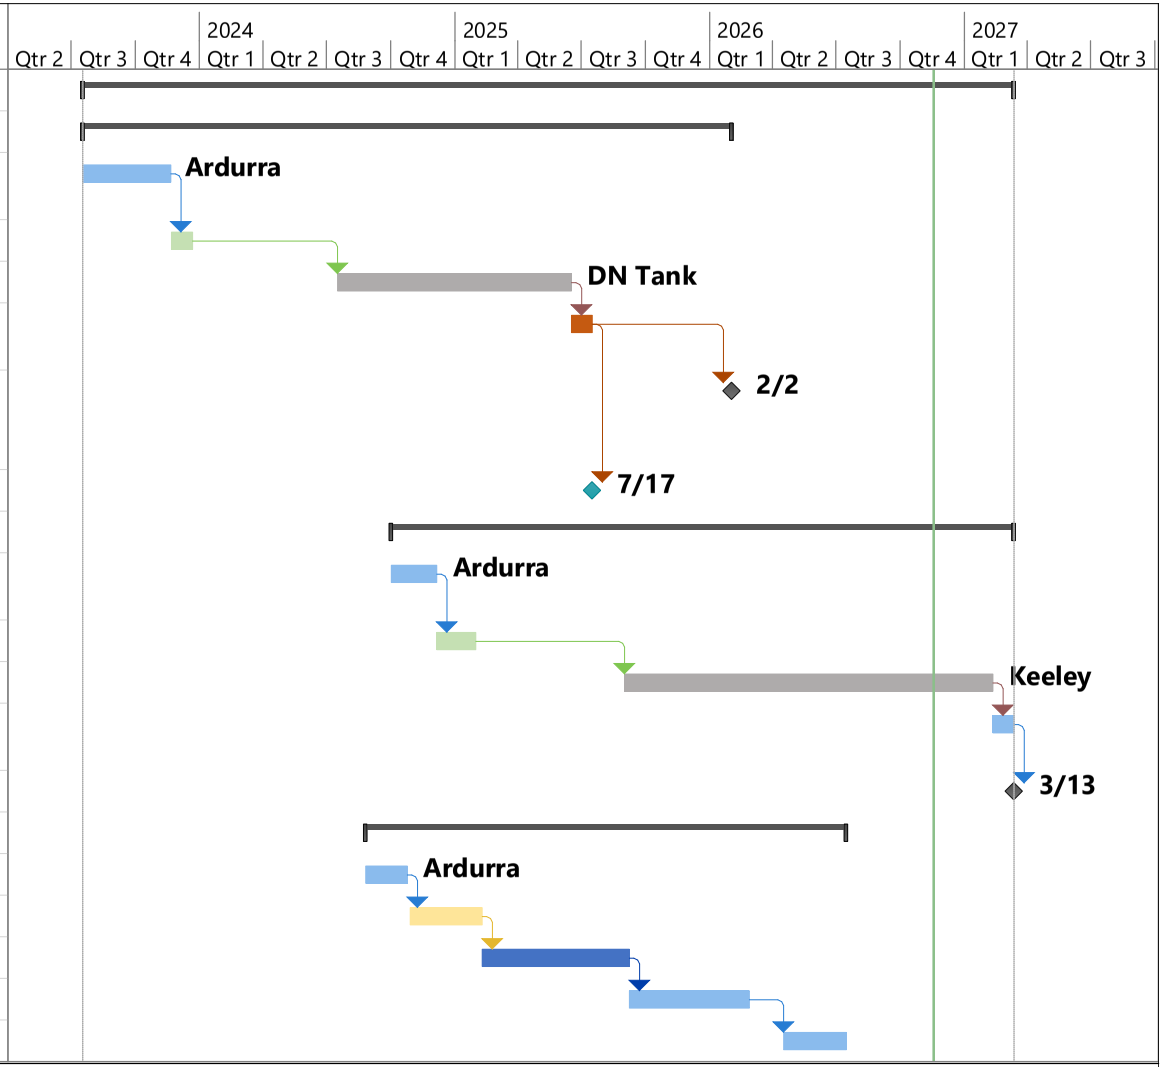

Project: Hays CAldwell Timeline
Date: 11/18/26

Task	Inactive Summary	External Tasks
Split	Manual Task	External Milestone
Milestone	Duration-only	Deadline
Summary	Manual Summary Rollup	Progress
Project Summary	Manual Summary	Manual Progress
Inactive Task	Start-only	
Inactive Milestone	Finish-only	


Task Name	Duration	Start	Finish
Lake Dunlap Projects	**906 days**	**8/12/24**	**2/4/27**
Filter Strainers	**906 days**	**8/12/24**	**2/4/27**
Engineering	119 days	8/12/24	12/9/24
Bid	57 days	12/9/24	2/4/25
Construction Stage #1	271 days	9/1/25	5/30/26
Substantial completion #1	0 days	5/30/26	5/30/26
Construction Stage #2	387 days	9/1/25	9/23/26
Substantial completion #2	30 days	9/23/26	10/23/26
Completion	0 days	10/23/26	10/23/26
Nanostone Improvements	**790 days**	**11/1/24**	**12/31/26**
Preliminary Design	790 days	11/1/24	12/31/26
Bid	TBD		
Construction	TBD		
Close out	TBD		
Completion	TBD		

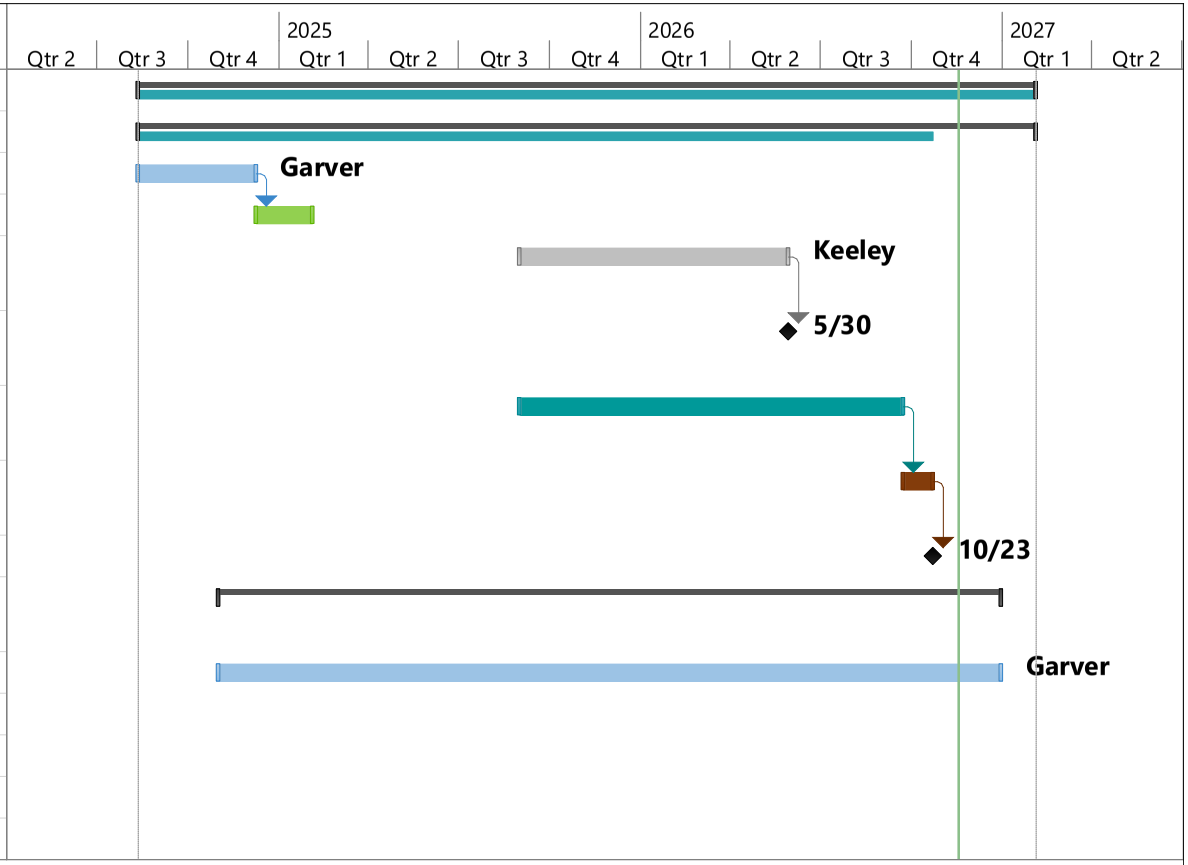

Project: Lake Dunlap Projects
Date: 11/18/26

Task		Inactive Summary		External Tasks	
Split		Manual Task		External Milestone	
Milestone		Duration-only		Deadline	
Summary		Manual Summary Rollup		Progress	
Project Summary		Manual Summary		Manual Progress	
Inactive Task		Start-only			
Inactive Milestone		Finish-only			


Task Name	Duration	Start	Finish
CRWA Pipeline Projects	**1115 days?**	**11/27/23**	**12/16/26**
Zuehl Relocation	**923 days?**	**11/27/23**	**6/7/26**
Design	36 days	11/27/23	1/2/24
Bid	27 days	1/2/24	1/29/24
Construction	120 days	1/29/24	5/28/24
Substantial completion	30 days	5/28/24	6/27/24
Substanital completion date achieved	0 days	5/13/26	5/13/26
Completion	0 days	6/27/24	6/27/24
TxDOT/CRWA IH-10 Conflict at Channel-D	**799 days**	**10/8/24**	**12/16/26**
Design	799 days	10/8/24	12/16/26
Bid	TBD		
Construction	TBD		
Close out	TBD		
Completion	TBD		

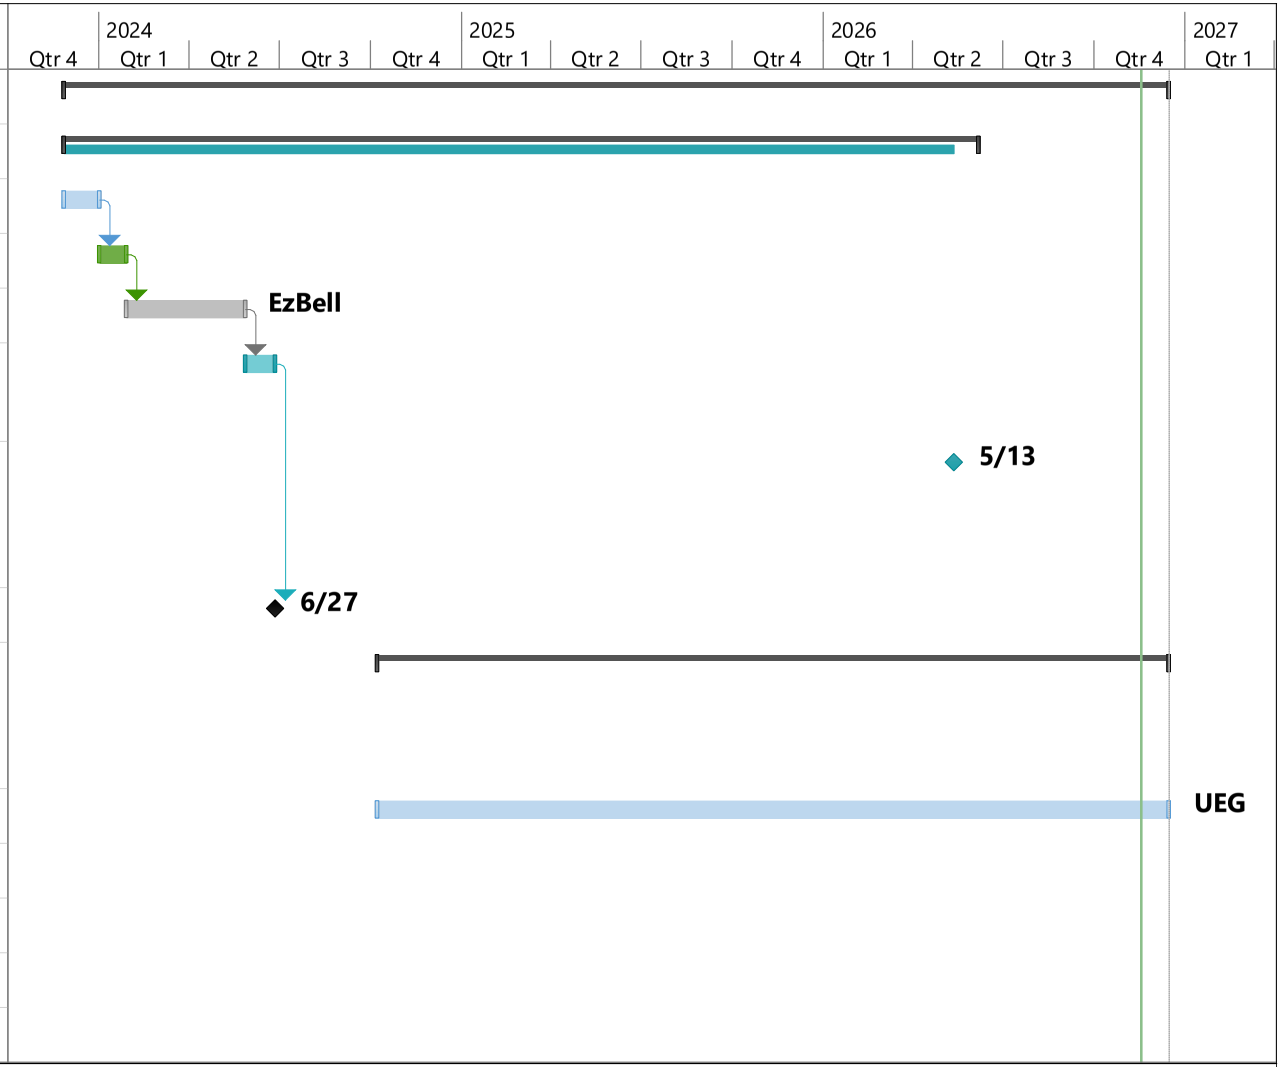

Project: Pipeline Projects Timeli
Date: 11/18/26

Task		Inactive Summary		External Tasks	
Split		Manual Task		External Milestone	
Milestone		Duration-only		Deadline	
Summary		Manual Summary Rollup		Progress	
Project Summary		Manual Summary		Manual Progress	
Inactive Task		Start-only			
Inactive Milestone		Finish-only			

Task Name	Duration	Start	Finish
Wells Ranch Projects	**1037 days**	**8/31/24**	**7/4/27**
Wells Ranch - Generator	**1037 days**	**8/31/24**	**7/4/27**
Design	149 days	8/31/24	1/27/25
Bid	32 days	1/27/25	2/28/25
Construction	703 days	2/28/25	2/1/27
Substantial completion	30 days	2/1/27	3/3/27
Completion	0 days	7/4/27	7/4/27

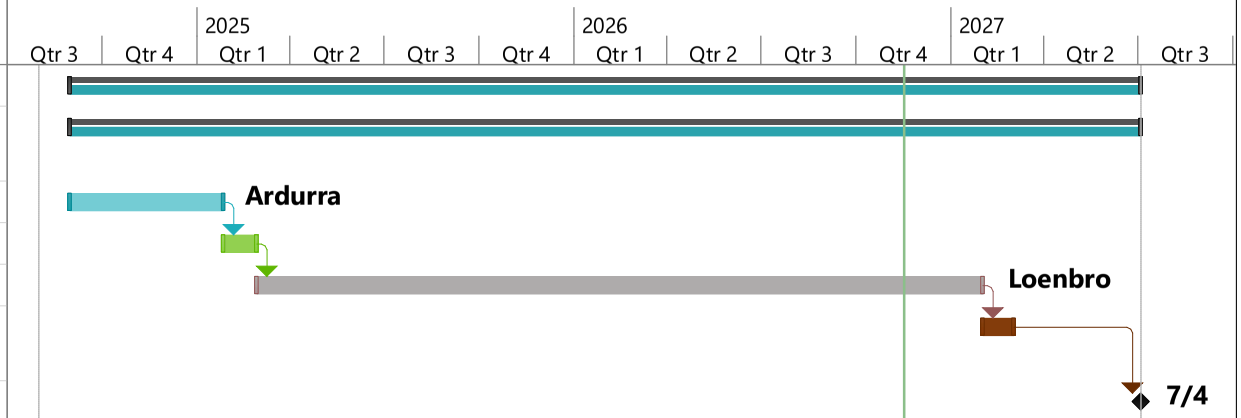

Project: Wells Ranch Timeline (F
Date: 11/17/26

Task	Inactive Summary	External Tasks
Split	Manual Task	External Milestone
Milestone	Duration-only	Deadline
Summary	Manual Summary Rollup	Progress
Project Summary	Manual Summary	Manual Progress
Inactive Task	Start-only	
Inactive Milestone	Finish-only	

To:	From:	Subject:
Canyon Regional Water Authority (CRWA)	STV, Inc. Marisa Vergara, PE Contract Manager	CRWA Project No. 2024-002 November Monthly Progress Report 11/17/2026

STV Service Order No.: 02 and 03
Wells Ranch Phase 3 Water Supply Study / WTP and Wellfield Expansion Study
Task Manager – Marisa Vergara, PE

WO 02 and 03 Scope

- Water supply study of the Wells Ranch Phase 3 project for additional groundwater supplies and associated evaluations.
- Water supply study for Wells Ranch Expansion including Wells 2, 14, 10 and Phase 3 expansion to be included for the addition of Well No. 10.

November 2026 Progress

- Prepared scope and fee for Wellfield and Route Study.

December 2026 Progress Planned

- Assist CRWA with Wellfield and Route Study.

STV Service Order No.: 06
Wells Ranch Well 10 & HSPS Expansion
Task Manager – Koy Dieckow, PE

Scope

- This work includes topographic survey, geotechnical engineering, design, and construction engineering services of Well No. 10 and an additional two (2) high service pumps (HSPs) at the Wells Ranch Water Treatment Plant (WTP) to service Springs Hill SUD.
- R.W. Harden and Associates Inc (RWH&A), as a subconsultant to STV, will perform the design and construction engineering services associated with Well 10.

Scope Elements Added/Removed

- None this month

November 2026 Progress

- Prepare submission to TCEQ Permit Review for Plans and Specifications.
- Hold coordination meeting with Spring Hills SUD/Malone-Wheeler for final design

December 2026 Projected Progress Planned

- Continue coordination with Spring Hills SUD/Malone-Wheeler for upcoming TCEQ Interconnect submittal. Pending RFI response from Springs Hills/Malone-Wheeler.
- Prepare bid package for advertisement, upon TCEQ and CRWA approval.

Project Schedule Summary

- Groundwater Modeling Completed w/ Recommendations for design (MW): December 2025
- Well 10 and HSPS TCEQ Submittal: November 2026
- Advertising Project: December 2026
- Recommend Award: January 2027
- Interconnection Between Two Public Water Systems TCEQ Submittal: Spring 2027
- Construction Completed (9 months duration): September 2027
- Status: Delay due to scheduled upgrades at Springs Hill facility.

STV Service Order No.: 07
Hays Caldwell WTP – Intake Repair
Task Manager – Rob Villarreal, PE

Scope

- This work includes design and construction engineering services related to the urgent repairs to the existing river intake structure on the San Marcos River for the Hays Caldwell Water Treatment Plant.

Scope Elements Added/Removed

- None this month

November 2026 Progress

- Reviewing permitting implications considered for Fountain Darter species. The previous approved Federal Permit expired March 2026.
- Initial coordination with USFWS has occurred. Further analysis on potential impacts is being conducted to further the discussion and findings memo.

December 2026 Projected Progress Planned

- Once plans are approved by CRWA, we have three contractors lined up to provide bids to construct the proposed Hays- Caldwell Plant alternative intake backwash solution.
- Finalize and submit required Federal and TCEQ permits if necessary.

Project Schedule Summary

- Assess Existing Conditions and Manufacturer/Supplier Engagement: June 2026
- Finalize Recommendation and Detailed Design: October 2026
- Collect three proposals for alt. intake backwash improvements: December 2026
- Recommendation for award: January 2027
- Construction: (3 months duration): February 2027
- Status: Delay due to regulatory review for environmental clearance.

STV Service Order No.: 08
Wells Ranch WTP – Raw Water Tank Structural Rehabilitation
Task Manager – Rob Villarreal, PE

Scope

- This work includes design and construction engineering services related to the condition assessment and structural repair design of the existing bolted steel tank concrete foundation for the Well Ranch WTP Raw Water Tank.
- This includes completion of a Condition Assessment Technical Memorandum with recommendations for rehabilitation approach and detailed design of the recommended rehabilitation alternative.

Scope Elements Added/Removed

- None

November 2026 Progress

- Researched three contractors to provide bids to apply the Polyurea coating to the tank foundation.
- Provide draft contract / solicitation documents to CRWA for review and approval.

December 2026 Projected Progress Planned

- Contractor outreach to provide bids to apply the Polyurea coating to the tank foundation.
- Present three (3) bids to CRWA staff with a recommendation on selection.

Project Schedule Summary

- Tank Assessment and Rehabilitation Recommendation: August 2026
- Finalize Recommendation and Detailed Design: October 2026
- Advertising / Collect three bids Project: December 2026
- Recommend Award: January 2027
- Construction: April 2027
- Status: Delay due to alternative solicitation process.

Utility Engineering Group, PLLC
191 N. Union Ave., New Braunfels, Texas 78130
Tel 830.214.0521

PROJECT STATUS REPORTS

PROJECT STATUS REPORT SUMMARY

REPORT DATE	PREPARED BY
November 13, 2026	David Kneuper, P.E. – Utility Engineering Group

TXDOT/CRWA IH-10 (SANTA CLARA & ZUEHL) TRANSMISSION LINE ENCASEMENT STATUS SUMMARY

The project includes the addition of approximately 190 LF of steel split casing on the existing CRWA transmission main at Santa Clara Road and the relocation and encasement of approximately 200 LF of the transmission main at Zuehl Road. The project is required due to the reconstruction of the two intersections by the Texas Department of Transportation (TxDOT) with their IH-10 expansion project.

The project pre-construction meeting was held on 2/27/2024. The project Notice-to-Proceed has been issued for 2/29/2024, giving the Contractor 120 calendar days to reach Substantial Completion and 150 calendar days (total) to reach Final Project Completion. The Contractor mobilized to the site and started work on 4/23/2024. As of 5/23/2024, the Contractor has completed the split casing and pavement restoration work at the Santa Clara intersection.

The project bore and casing pipe installation was completed on 12/10/2024. UEG provided a notice to the Contractor on 7/16/2024, on 8/29/2024, 10/16/2024, 1/5/2025, 2/25/2025, 3/25/2025, 5/8/2025, and most recently on 6/17/2025, of the final completion date and outlined the requirements for delays in the Contractor's progress as provided in the contract documents.

On 5/12/2026, the contractor completed the project tie-ins and on 5/13/2026, the contractor completed the project abandonment. A final project site walk was held on 6/2/2026, with a final project punch list being provided to the contractor. The project substantial completion letter dated 5/13/2026 has been provided to the contractor. The CRWA physical punch list items have been completed. The contractor is working towards finalizing the CRWA close-out documentation. The TxDOT punch list items remain and will be coordinated with TxDOT's maintenance division. As of the date of this report, the contractor has provided the contractor redlines, affidavit of all bills paid, and the consent of surety. Once the warranty bond is provided, UEG will issue the notice of acceptability and will coordinate with CRWA and the contractor to review and execute the final retainage payment application to close-out the project.

The contract amount is currently $541,424.21, which includes the original bid and approved Change Order's No. 1 and No. 2, all of which are fully reimbursable. A request for reimbursement was submitted to TxDOT on 12/18/2024 for a partial project payment in the amount of $213,969.43. Payment for the initial partial payment request was received by CRWA on 8/28/2026 ($192,572.49 – less 10% retainage).

TXDOT IH-10 CRWA CONFLICT AT CHANNEL D RELOCATION STATUS SUMMARY

The project includes the relocation design of CRWA's existing 30" water transmission main that crosses IH-10, just west of the intersection of Santa Clara Road and IH-35. The existing 30" transmission main was originally constructed with CRWA's IH-10 Bore Crossing Project in 2014. The relocation will include approximately 500 linear feet of 30" transmission main, associated casing pipe, and connections to the existing CRWA 24" concrete pressure pipe (C303) along IH-10 as well as the existing 30" ductile iron main running perpendicular to the highway. This proposed relocation is required due to a conflict with TxDOT's proposed Channel D, along the east bound frontage road at TxDOT centerline STA 15102+70. The proposed drainage improvements are associated with TxDOT's IH-10 expansion project between the Cibolo Creek and Linne Road (TxDOT Project No. CSJ 0025-03-097).

Utility Engineering Group was authorized by CRWA on 10/8/2024 to begin work on the project. UEG's survey sub-consultant provided the existing project conditions survey file to UEG on 1/2/2025. UEG finalized and submitted the preliminary relocation plan set and project cost estimate to CRWA for review on 2/28/2025. On 4/11/2025, UEG provided the draft plans and reimbursement cost estimate to TxDOT for review.

On 5/20/2025, a site visit was held with TxDOT, UEG, and CRWA staff to discuss the possibility of a modification to TxDOT's plans to allow the contractor to continue working, avoid TxDOT contractor delays, and provide CRWA additional time to relocate the main. Based on the site meeting, a solution was developed and agreed to by all parties. UEG provided an updated set of plans to CRWA for review on 8/13/2025. On 9/17/2025, CRWA approved the draft plans. Based on the CRWA plan approved, UEG prepared the draft supplemental standard utility agreement with submittal to TxDOT for review on 9/26/2025. A meeting was held on 12/9/2025 between UEG and TxDOT to discuss TxDOT comments on the draft supplemental standard utility agreement. TxDOT sent the updated final draft supplemental utility agreement for CRWA final review and approval on 2/20/2026. The CRWA Board of Trustees approved the supplemental agreement at their board meeting on 4/20/2026, and the agreement was executed by all parties on 4/29/2026. UEG provided the easement acquisition documents to the City of Cibolo for review on 6/11/2026. As of 8/31/2026, the City is agreeable to CRWA's easement documentation and request and UEG is currently coordinating with CRWA to finalize the acquisition. TxDOT Supplemental Agreement No. 3 for the overall project, to include an exception to policy that will allow the easement costs to be reimbursed, was executed by the CRWA Board President on 7/22/2026. The estimated cost, including construction, design, and easement acquisition is $1,443,766.00, which is 100% reimbursable to CRWA.

Memo

To: Kerry Averyt, General Manager
Canyon Regional Water Authority

From: Yue Sun, P.E., BCEE

Date: November 30th, 2026

Re: Project Status Report for:
Hays Caldwell WTP Improvements
Wells Ranch Emergency Generator Improvements

Below is the Project Status Report for the Hays Caldwell Water Treatment Plant Improvements and Wells Ranch Emergency Generator Improvements projects:

HC WTP Facility Improvements:

- Phase 1 Construction Status
  - Received 97 submittals and all have been reviewed and returned.
  - Received 15 RFIs and all have been reviewed and returned. No outstanding RFIs.
  - Reviewed and approved pay applications.
  - Continued misc. coordination with CMCI team and General Contractor.
  - Conducted a substantial completion walkthrough on 2/2/2026 and punch list has been distributed on 2/11/2026.
    - DN provided status updates on 3/12/2026 for some punchlist items and followed up with more updates on 4/9/2026
    - Ardurra provided responses on 4/15/2026 to DN and Cobb Fendley
    - RHSI provided inspection report of completed and outstanding items on 4/17/2026
    - DN provided update on outstanding items on 5/6/2026 following site walkthrough
    - Ardurra provided comments on outstanding/unresolved punchlist items on 5/7/2026
    - Pending DN completion of outstanding items and Cobb Fendley to field verify completion.
  - Attended final completion walkthrough on 9/15/2026.

- Cobb Fendley and Ardurra identified outstanding items that have not been resolved since Substantial Completion and requested for DN to provide documentation of completion via email sent on 9/21/2026 (Cobb Fendley) and 9/28/2026 (Ardurra).
- Cobb Fendley and Ardurra also requested written confirmation from DN, Keeley, and/or CRWA (as applicable) of items that have either been approved as is by CRWA, or will be handled by Keeley in Ph 2 project.
    - CRWA has requested on 10/13/2026 for ALL items to be completed for Phase 1 by DN prior to closing out the project. Identification marking on the pipes was previously pushed to be completed in Phase 2 by Keeley.
    - Outstanding items, including replacement of bolts on GST fill line and painting identification markers on pipes, have been completed.
        - DN provided photo documentation on 10/27/2026 of the bolts being replaced on the GST Fill Line.
        - DN provided photo documentation on 11/4/2026 of identification markers added to piping with zip ties. CRWA confirmed on 11/16/2026 that the zip ties are acceptable in lieu of piping label painting per Specification 09 90 00, which Ardurra previously referenced in the Final Completion punchlist.

- Ardurra has completed Record Drawings and sent to CRWA and Cobb Fendley on 11/16/2026.
- Ardurra communicated via email on 9/30/2026 that CRWA should advise DN Tanks final hard copies of the approved O&M Manuals as part of close-out, pending final confirmation from CRWA.
- Ardurra sent example Final Completion certificate to CRWA on 10/23/2026, pending confirmation from CRWA if they want to use Ardurra's template or other's.

- Phase 2 Ozone Improvements Construction Status
    - Received 206 submittals and 205 have been returned.
    - Received 74 RFIs and 72 have been returned.
    - Reviewed and approved pay applications.
    - Misc. coordination with Primozone, Keeley and CRWA to discuss submittal coordination.

- HC WTP Membrane Replacement Pilot Study
    - Coordination with TCEQ TOP team on Step 2 Submittal, and the Step 2 Approval for Use package for Pall Trailers was submitted on 4/23/2026. The approval for use letter was received on 6/16/2026 for both Pall mobile trailers.
    - Coordination with TCEQ to address their comments and supplement additional data as requested by TCEQ.

- TCEQ pilot report approval letter was received on September 29, 2026.

- HC WTP 3rd Pall Trailer Installation Engineering Services
  - Notice of proposal acceptance was received on October 20, 2026.
  - Conducted a site visit on October 27, 2026.
  - Conducted a coordination meeting with CRWA on 11/4/2026 and provided a data request list.
  - Coordinated with power company and requested historical data for the electrical evaluation.

Wells Ranch WTP Improvements:

- Received 22 submittals and all have been returned.
- Attended construction progress meetings.
- A meeting was held on site on 10/8/2026 with Ardurra, contractor, and CRWA to coordinate plant shutdowns and timeline. Contractor proposed a maximum of 8 hrs per electrical service to complete the required work on the main breaker sections. An updated shutdown schedule will be provided for review. CRWA has communicated a preference for shutdowns to take place during winter months as demand is typically lower.
  - Tentative timeline for shutdowns of all sites:
    - Leissner - January
    - Wagner - January
    - Dead Man Well - mid November
    - Wells Ranch Treatment Plant - January/February

HC WTP TWDB SWIFT Application:

- TWDB Board approved this application on July 23, 2024. CRWA decided not to pursue.

TWDB DWSRF Application:

- Project Information Form (PIF) submitted on March 1, 2024.
- Two separate PIFs, one for HC WTP Expansion (Phase 2 +Membrane), and one for Pipeline.
- Both CRWA HC WTP and Pipeline projects are on the approved intended use plan list.

911 Central Parkway N.
Suite 401
San Antonio, TX 78232

TEL 210.447.6250

www.GarverUSA.com

Canyon Regional Water Authority
Lake Dunlap WTP Improvements

To: Kerry Averyt, PE
General Manager
Canyon Regional Water Authority

From: Greg Swoboda, PE

Date: November 17, 2026

RE: Lake Dunlap WTP Imp Project
Project Status Report

Below is a status update for the Lake Dunlap WTP Improvements.

Strainer Improvements

1. Garver incorporated CRWA comments into a 100% design package.
2. Contractor outreach was conducted prior to advertising the project.
3. Garver delivered the 100% design/bid documents and uploaded to CivCast on 12/9/24.
4. A non-mandatory pre-bid meeting was held on 12/17/24.
5. Five (5) general contractors attended the pre-bid meeting.
6. Garver issued Addendum No. 1 on 12/19/24.
7. Garver issued Addendum No. 2 on 1/8/25 (to change bid date).
8. Garver issued Addendum No. 3 on 1/21/25.
9. Proposal opening (for Competitive Sealed Proposal) took place on 2/4/25.
10. Three (3) proposals were received.
11. Preliminary evaluation (ranking) of proposals was conducted.
12. Provided Draft Recommendation for best value proposer.
13. Conducted discussion with CRWA and with best value proposer.
14. Selected Keeley Construction as best value proposer.
15. Board of Trustees approved Keely Construction at meeting on 4/14/25.
16. Construction Phase.
    a. Pre-Construction Meeting held 6/24/25.
    b. Contractor NTP issued on 9/1/25.
    c. Change order added 91 days.
    d. Substantial Completion No. 1 – 271 days
    e. Substantial Completion No. 2 – 341 days

f. Final Completion – 361 days
g. Contractor conducted initial site investigation.
h. Temporary disc filter pad placed.
i. Temporary disc filter pipe supports placed.
j. HDPE piping received.
k. HDPE piping installed.
l. Piping tie-ins from temporary system to permanent system made on 6/10/26.
m. Disc filter system received.
n. Disc filter system installed at temporary location.
o. Isolation of existing filter system on 8/27/26.
p. Temporary filter system started up on 9/17/26. Working through backwash sequencing cycling.
q. Temporary filter system is being utilized.
r. Original filter system has been removed from the existing building.
s. Permanent piping installation is ongoing in the existing building.
t. Planned to move new filter system from temporary location to existing building in December.
u. Submittals – 81 received, 78 reviewed, 3 under review.
v. RFIs – 23 received, 21 reviewed, 2 under review.
w. Contractor Pay Apps – Pay App No. 12 being processed.
x. Coordination with Contractor (Keeley) and CRWA.

Membrane Improvements

1. Scope of work and fee approved.
2. Task Order signed on 8/15/25.
3. Kick-off Meeting held on 8/27/25.
4. Tank inspection conducted on 10/1/25.
5. Conducted Tank Inspection Findings Meeting with CRWA on 10/28.
    a. Meeting and inspection findings yielded decision to postpone tank rehabilitation work in favor of longer-term master planning of Clearwell storage alternates.
6. Membrane Improvements Evaluation Memo meeting held with CRWA on 11/18.
7. Membrane Improvements Evaluation TM submitted to CRWA on 12/12.
    a. CRWA comments on Evaluation TM.
8. Membrane Improvements Bench Scale Testing Plan submitted to CRWA on 1/7.
    a. CRWA comments on Bench Scale Testing are requested.
9. Membrane Improvements Clarifier/Tube Settler Evaluation TM submitted to CRWA on 1/22.
    a. CRWA comments on Clarifier/Tube Settler Evaluation are requested.
10. Meeting held with CRWA on 09/21/26 regarding the membrane improvements.
11. Planned scope of work includes.
    a. Topographic survey has been conducted at the site.
    b. Geotechnical services.
    c. Membrane improvements evaluation for consideration for 14.4 to 16.0 mgd.

d. Tank rehabilitation work package (per Item #5, intent is to modify work scope to align with master planning and/or detailed design of tank replacement).
e. Pre-treatment evaluation.
    i. Clarifier and plate/tube settler evaluation.
    ii. Ozone relocation.
    iii. Coagulant evaluation.
    iv. TTHM Evaluation
    v. TCEQ BIN Classification Support
f. Membrane improvements design-preliminary and final.
    i. Membrane skids.
    ii. Membrane feed pumps.
    iii. Membrane backwash pump and yard piping.
    iv. Backwash plant drain system.
    v. Electrical and I&C improvements.
    vi. Correspondence with TCEQ.
    vii. OPCC
g. Clarifier and plate/tube settler design.
h. Bid phase services.
i. Construction phase services.

Xc: Bobby Rodriguez, CRWA
Adam Telfer, CRWA
Buddy Boysen, Garver
Tyson Hann, Garver